




ASP250 ALUMINIUM-SANDWICH PASSIVE  
RADIATOR

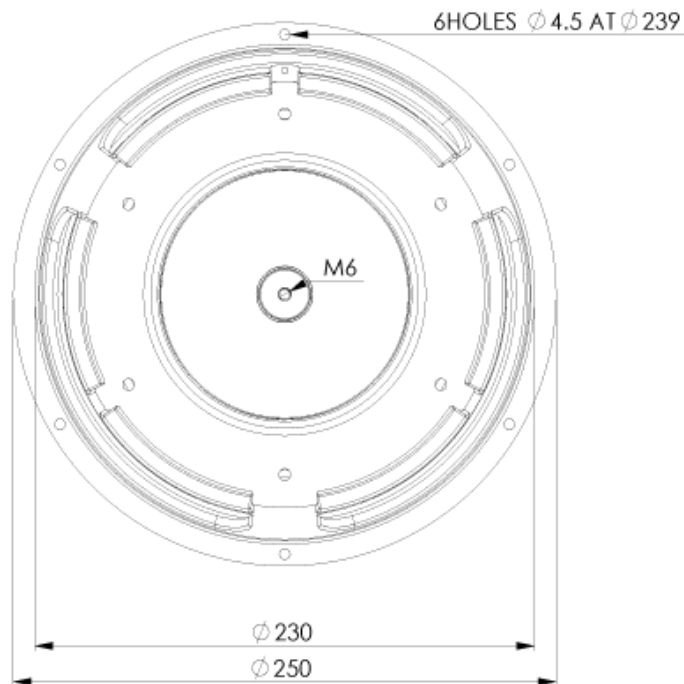

Dome material	Aluminium Sandwich
Application	Passive Radiator
Overall diameter	250 MM
Cutout Diameter/Square	230 MM
Overall depth	85 MM
Motor assembly depth	-- mm
Motor assembly diameter	-- mm

## MAIN FEATURES

--

## MECHANICAL DATA

Specification	Value	Unit
Overall diameter	250	mm
Cutout Diameter/Square	230	mm
Min. frontplate thickness	18	mm
Overall depth	85	mm
Motor assembly depth	0	mm
Motor assembly diameter	0	mm
Screwfitting	DIN 7984 / 4.50mm	mm
Terminal	0	mm
Shipping weight (pair)	10	Kg
Shipping box size (pair)	320/320/450	mm

## THIELE/SMALL PARAMETERS

Specification		Value	Unit
Sensitivity (2.83V / 1m)	Spl	0	dB
DC-resistance	Re	0	Ohm
Resonance frequency	Fs	22	Hz
Equivalent volume of air	Vas	119	ltr
Mechanical Q	Qms	0	
Electrical Q	Qes	0	
Total Q	Qts	0	
Effective piston area	Sd	382	Cm2
Moving mass	Mms	93	g
Suspension compliance	CMs	0.57	mm/n
Mechanical resistance	Rms	2.5	Kg*s

## VOICE COIL PARAMETERS

Specification		Value	Unit
Power handling	P	0	W
Linear excursion	Xmax	15	mm
Voice coil diameter		0	mm
Voice coil former material		0	
Voice coil material		0	
Voice coil inductance	Le	0	mH
Force factor	Bl	0	N/A
Motor type		0	
Ferrofluid filling		No	