


Parameters

Impedance (Ω)	16
Re (Ω)	15.7
Le (mH) @ 1 kHz	1.35
Fs (Hz)	401
Qms	2.55
Qes	5.28
Qts	1.72
Mms (g)	0.05
Cms (mm/N)	3.23
Sd (cm ²)	3.1
Vd (cm ³)	0.03
BL (Tm)	0.60
VAS (liters)	0.04
XMAX (mm)	0.1
VC Diameter (mm)	12.5
SPL (dB 1W/1m)	77
RMS Power Handling (w)	0.5
Usable Frequency Range (Hz)	400-20,000

Features

- Lightweight Mylar diaphragm
- Extended frequency range
- Neodymium magnet structure
- Injection-molded nonmetallic frame
- Suitable for headphone applications
- 16 ohm impedance

Frequency Response

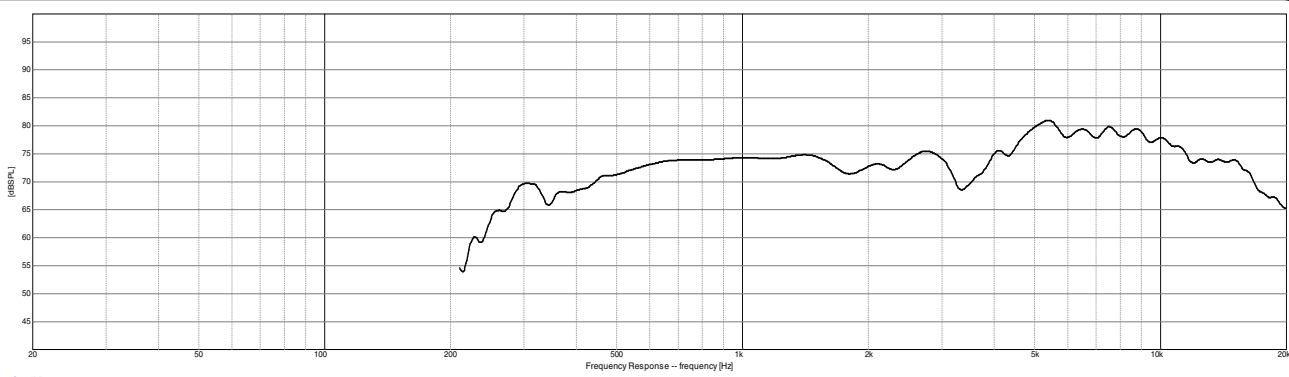

Note: Frequency response measured at 1.0m using 2.83V stimulus (0.5W)

Note: All dimensions in mm.

Impedance/Phase

