





1" Silk Dome Tweeter 10W 4 ohm

CE35-4

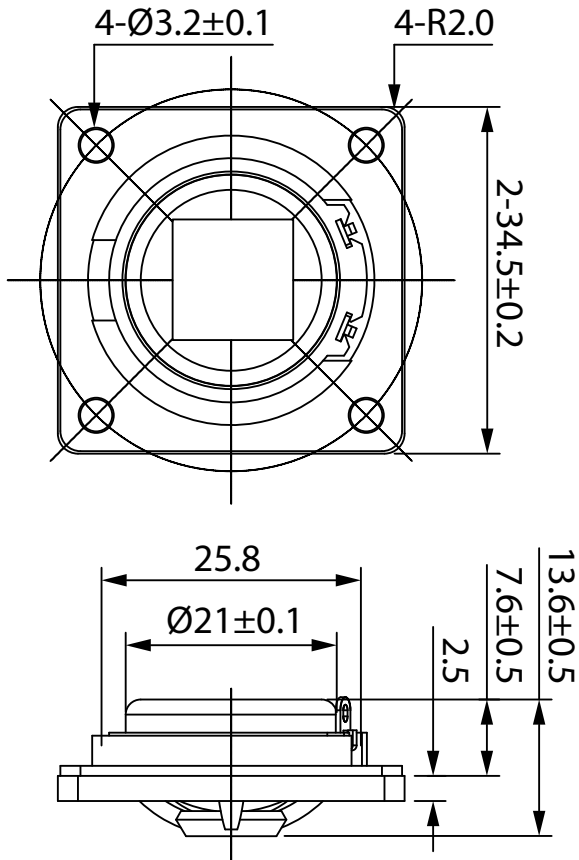

PARAMETERS	
Impedance	4 ohms
Re	3.3 ohms
Le	0.01 mH @ 10 kHz
Fs	3,300 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	16 mm
SPL	90 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	15 watts
Usable Frequency Range (Hz)	3,500 - 17,000 Hz

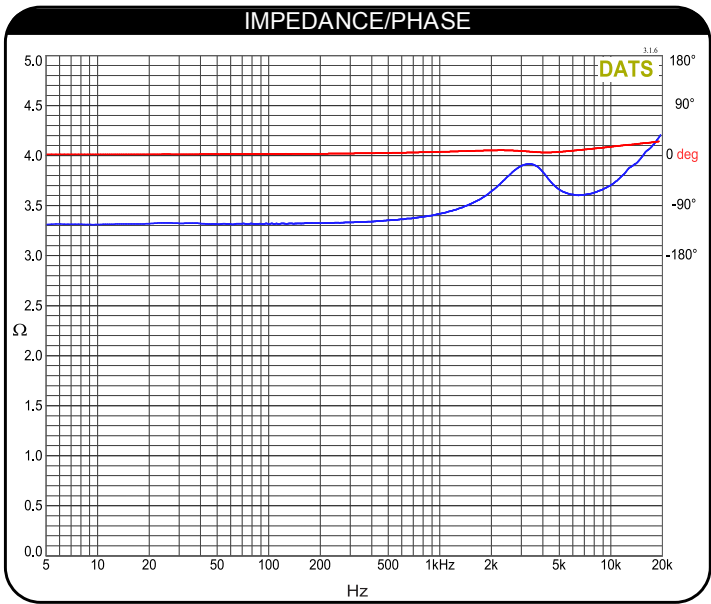

- ### FEATURES
- High economic value
 - Delivers crisp, clear audio, ensuring an immersive listening experience
 - High-quality audio solutions without breaking the bank, ideal for budget-conscious projects
 - Suitable for commercial installations, DIY projects, art exhibits, and more

