


FEATURES

- Smooth, extended response
- Treated silk dome
- Damped rear chamber lowers resonance
- Ferrofluid cooled voice coil
- Sounds like tweeters costing far more!


PARAMETERS

|                             |                     |
|-----------------------------|---------------------|
| Impedance                   | 8 ohms              |
| Re                          | 5.4 ohms            |
| Le                          | 0.09 mH @ 10 kHz    |
| Fs                          | 834 Hz              |
| Qms                         | 0.81                |
| Qes                         | 1.33                |
| Qts                         | 0.50                |
| Mms                         | N/A                 |
| Cms                         | N/A                 |
| Sd                          | 6.6 cm <sup>2</sup> |
| Vd                          | N/A                 |
| BL                          | N/A                 |
| Vas                         | N/A                 |
| Xmax                        | N/A                 |
| VC Diameter                 | 29 mm               |
| SPL                         | 89 dB @ 1W/1m       |
| RMS Power Handling          | 50 watts            |
| Usable Frequency Range (Hz) | 1,300 - 20,000 Hz   |

IMPEDANCE/PHASE

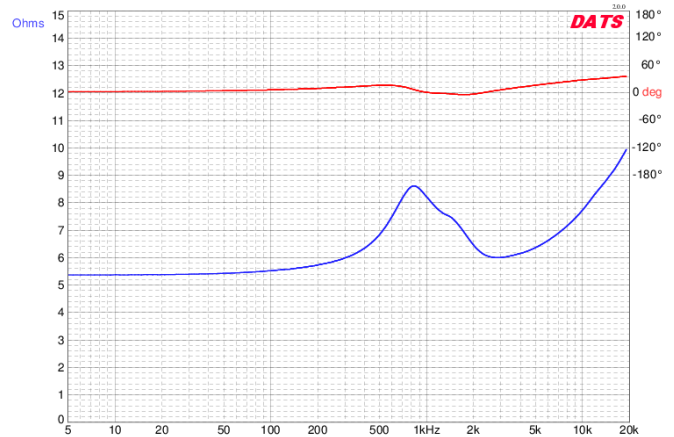

FREQUENCY RESPONSE

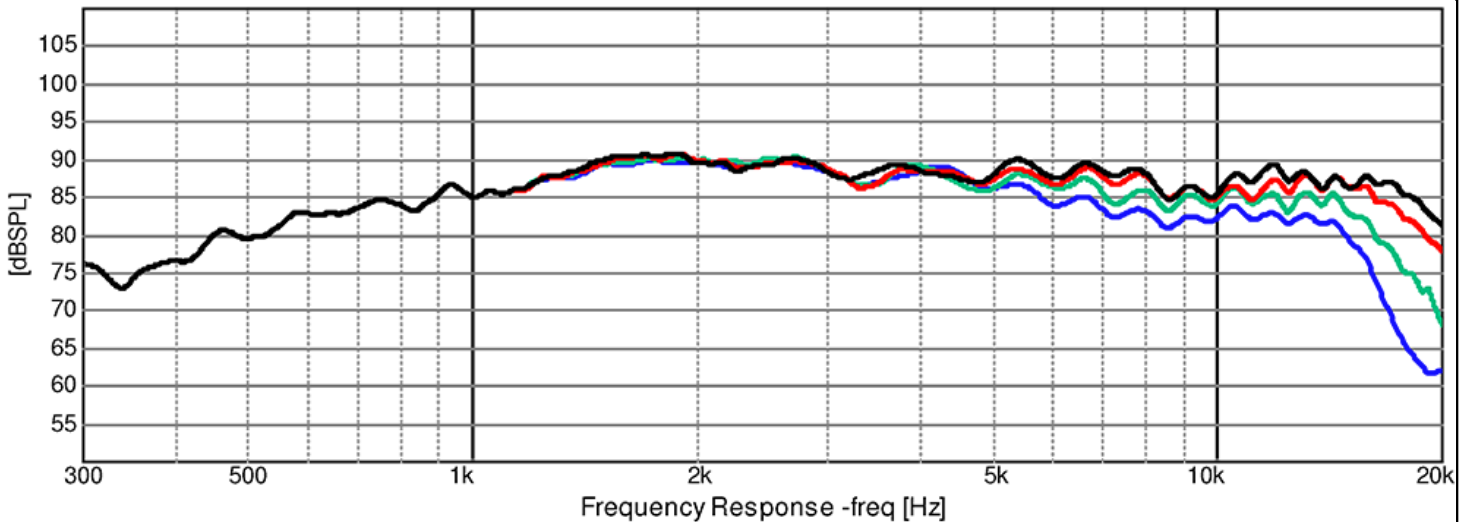

OmniMic

Note: 1/24<sup>th</sup> octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°