
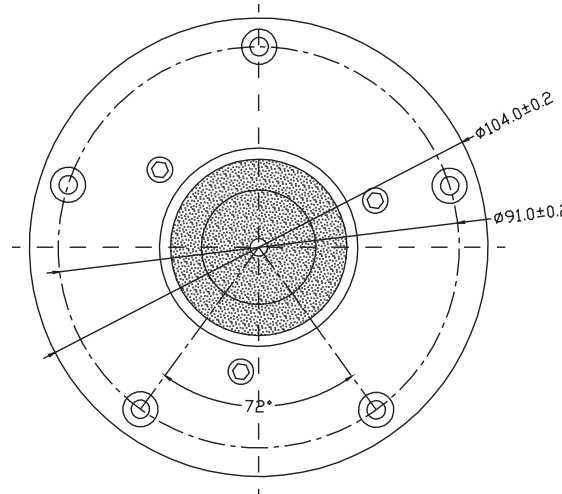


ES25Nd-4

1" Ring Dome Neodymium Tweeter 4 Ohm

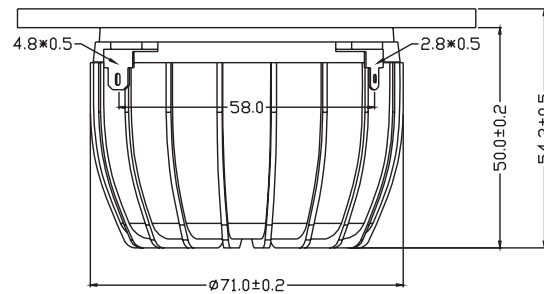

Note: All dimensions in mm.


Features

- Powerful neodymium ring motor
- Copper pole sleeve and cap reduce inductance
- Very low resonance frequency
- Pinned Center Dome technology
- Large damped rear chamber
- Ferrofluid voice coil cooling

Parameters


Impedance (Ω)	4
Re (Ω)	2.93
Le (mH) @ 1 kHz	0.034
Fs (Hz)	475
Qms	1.06
Qes	0.38
Qts	0.28
Mms (g)	0.44
Cms (mm/N)	0.25
Sd (cm ²)	11.9
Vd (cm ³)	—
BL (Tm)	3.17
VAS (liters)	—
XMAX (mm)	1
VC Diameter (mm)	25
SPL (dB 2.83V/1m)	90.4
RMS Power Handling (w)	30
Usable Frequency Range (Hz)	1,480-20,000

Frequency Response

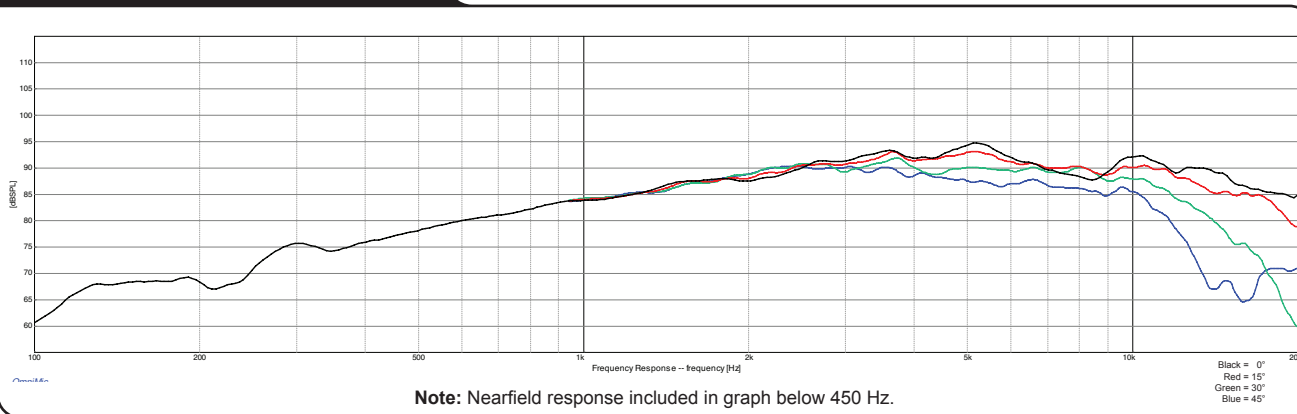

daytonaudio.com

Impedance/Phase

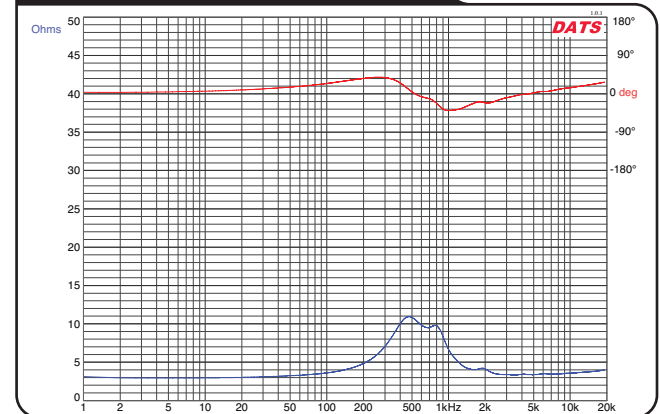

© Dayton Audio Last Revised: 9/22/2014