



10PR-8 10" POLY CONE RUBBER SURROUND WOOFER


FEATURES

- Polypropylene cone for perfect balance of stiffness, mass, and self-damping
- Butyl rubber surround ensures high excursion and long-term durability
- Optimized motor features high-energy ceramic ferrite magnet, vented pole piece
- Great replacement speaker


PARAMETERS

Impedance	8 ohms
Re	7.3 ohms
Le	1.1 mH
Fs	40 Hz
Qms	3.68
Qes	1.32
Qts	0.97
Mms	45.7 g
Cms	0.34 mm/N
Sd	345.1 cm ²
Vd	104 cm ³
BL	8.0 Tm
Vas	57.3 liters
Xmax	3 mm
VC Diameter	38 mm
SPL	87 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	80 watts
Usable Frequency Range (Hz)	35 - 3,000 Hz

IMPEDANCE/PHASE

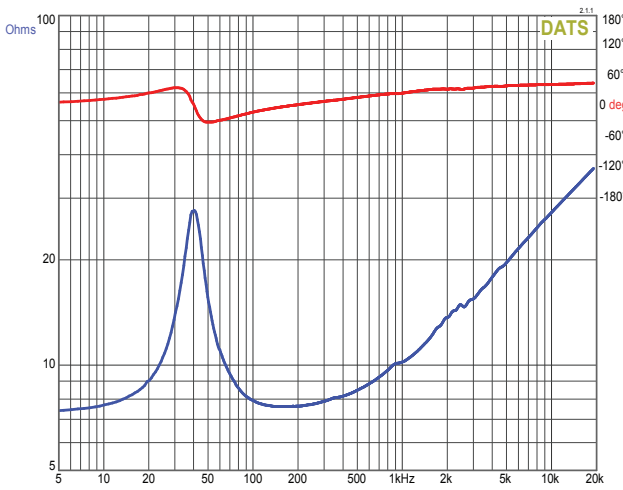

FREQUENCY RESPONSE

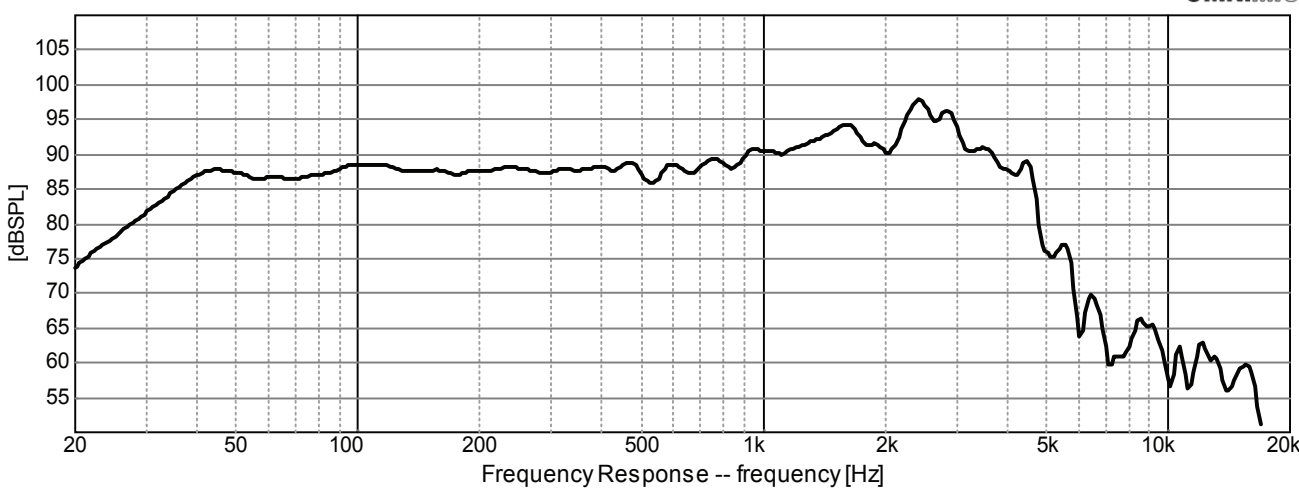

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

MECHANICAL DRAWING

