




10SMP-8 10" WOOFER SURFACE MOUNT POLY CONE 8 OHM


MECHANICAL DRAWING

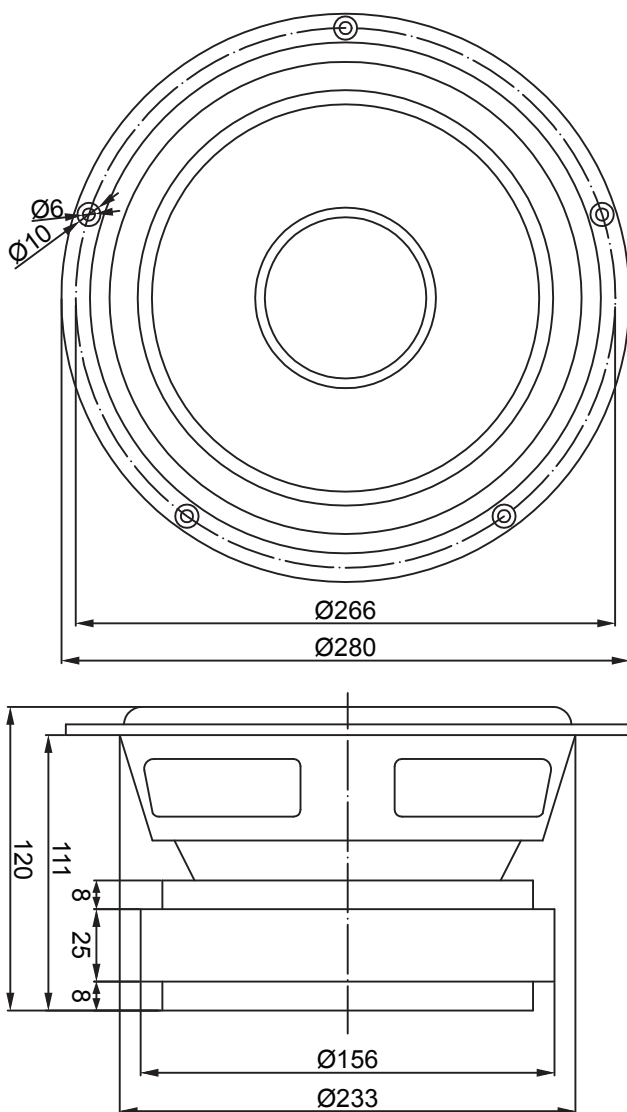

FEATURES

- Damped poly cone with rubber surround for controlled resonance
- Copper cap reduces inductance and distortion
- Low profile frame suitable for surface mount installations
- Vented pole piece improves cooling to limit power compression
- Aluminum voice coil former for rapid heat transfer and thermal stability
- Integrated foam gasket for an airtight cabinet seal

IMPEDANCE/PHASE

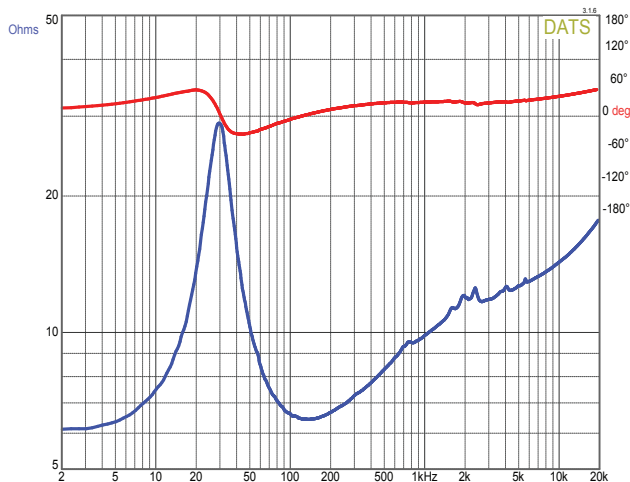

PARAMETERS

Impedance:	8 ohms
Re:	6.1 ohms
Le:	0.46 mH
Fs:	29 Hz
Qms:	2.75
Qes:	0.73
Qts:	0.58
Mms:	61g
Cms:	0.49 mm/N
Sd:	340 cm ²
Vd:	170 cm ³
BL:	9.6 Tm
Vas:	81 liters
Xmax:	5 mm
VC Diameter:	39 mm
SPL:	87.5 dB@2.83V/1m
RMS Power handling:	70 watts
Usable Frequency Range (Hz):	24 – 2,000 Hz

FREQUENCY RESPONSE

