69AS-4

6" X 9" CAR REPLACEMENT SPEAKER 4 OHM

FEATURES

- Common 6" x 9" size drops into many OEM speaker locations
- Poly cone helps keep unwanted cone resonance under control
- Treated foam surround further reduces resonance for cleaner sound
- Aluminum voice coil former improves heat dissipation for better power handling
- Mylar whizzer cone extends high-frequency output

PARAMETERS

Impedance:	4 ohms
Re:	3.7 ohms
Le:	0.27 mH
Fs:	72 Hz
Qms:	5.67
Qes:	2.09
Qts:	1.53
Mms:	18.2g
Cms:	0.27 mm/N
Sd:	202 cm^2
Vd:	52.6 cm^3
BL:	3.8 Tm
Vas:	15.6 liters
Xmax:	2.6 mm
VC Diameter:	26 mm
SPL:	90.0 dB@2.83V/1m
RMS Power handling:	60 watts
Usable Frequency Range (Hz):	65 – 6,000 Hz

MECHANICAL DRAWING

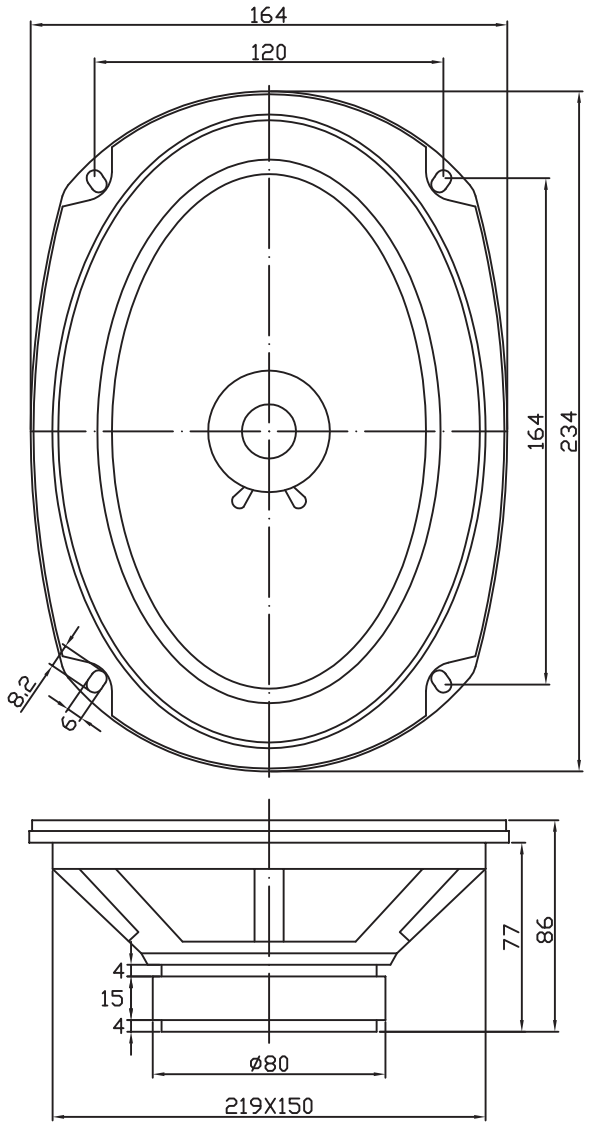

IMPEDANCE/PHASE

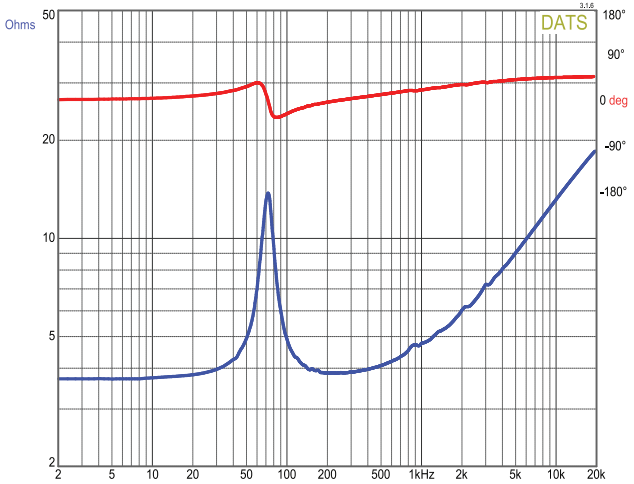

FREQUENCY RESPONSE

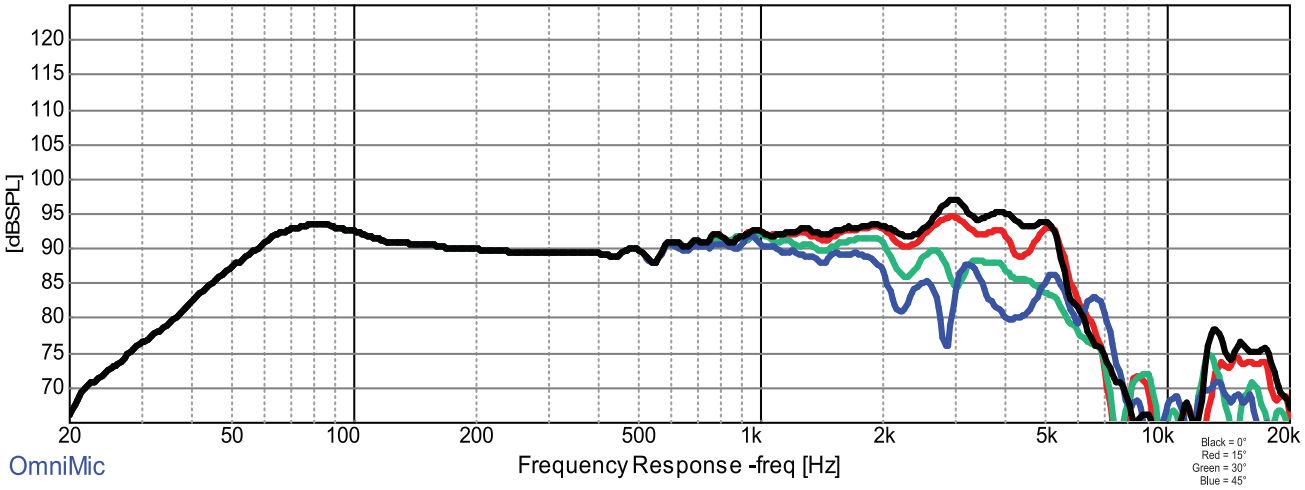

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.