

D3220TI

Professional Compression Driver


PRV
audio
BRAZIL

KEY FEATURES


- 3" Voice coil and 2" exit
- 110 Watts continuous power handling
- 108 dB Sensitivity
- High grade Titanium Diaphragm

GENERAL SPECIFICATIONS

Exit Throat Diameter	2" (50 mm)
Nominal Impedance	8 Ohms
Rated Power Handling	110 Watts
Program Power	220 Watts
Sensitivity 2.83V at 1m*	108 dB
Recommended High Pass Crossover**	1600 Hz*** **for Full Power Handling ***12 db/oct Crossover
Frequency Response at -10dB	1,200-17,000Hz
Voice Coil Diameter	3"(76.2 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.80 T
Magnet Material	Ferrite

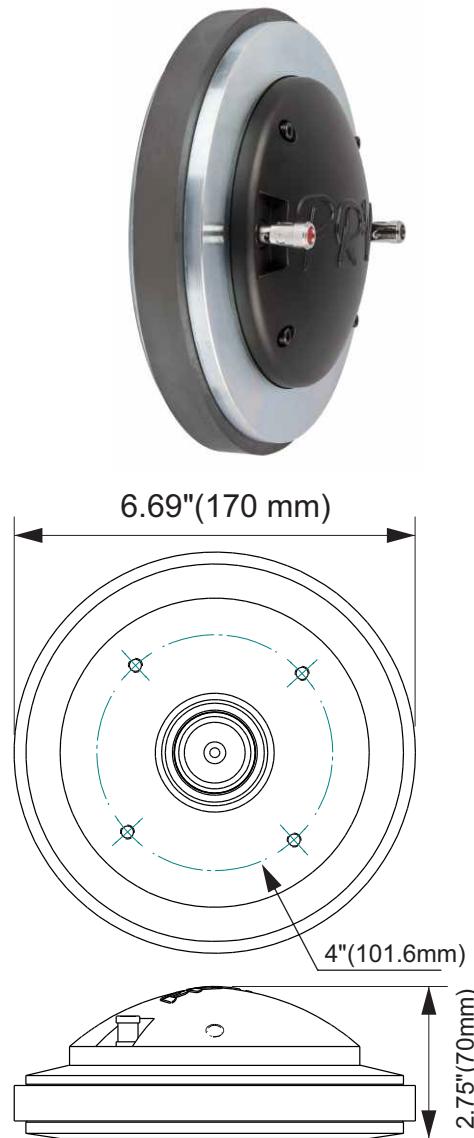

Frequency Response Measured at 2.83V/1m

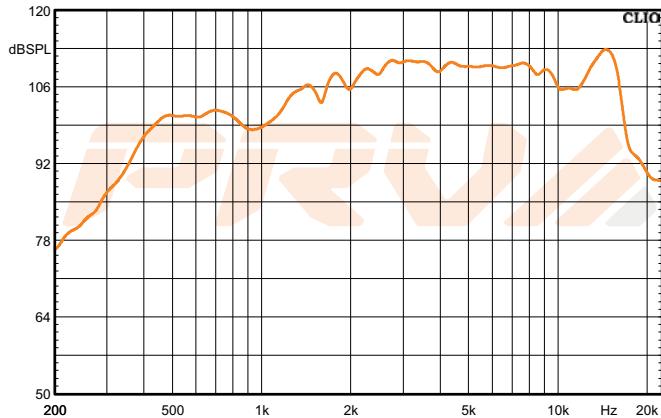

*Frequency Response Measured on WG14-50CR

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
FORT LAUDERDALE, FL SAO LEOPOLDO, RS
support@prvaudio.com vendas@pvaudio.com.br
www.prvaudio.com www.pvaudio.com.br

EXTRA INFO