

TW450Ti-Nd-4

Professional Super Tweeter



KEY FEATURES

- 1.0" Voice coil
- 60 Watts continuous power handling
- 107 dB Sensitivity
- Neodymium Magnet
- Titanium Diaphragm
- 2 mounting options(3 rings supplied)

Nominal Impedance	4 Ohms
Rated Power Handling	60 Watts
Program Power	120 Watts
Sensitivity 2.00V at 1m*	107 dB
Recommended High Pass Crossover**	6000 Hz***
for Full Power Handling	*12db/oct Crossover
Frequency Response at -10dB	4,500-20,000Hz
Voice Coil Diameter	1.0"(25.4 mm)
Voice Coil Wire	Aluminum
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.45 T
Magnet Material	Neodymium


Mounting option 1:



Mounting option 2:




Frequency Response Measured at 2.00V/1m

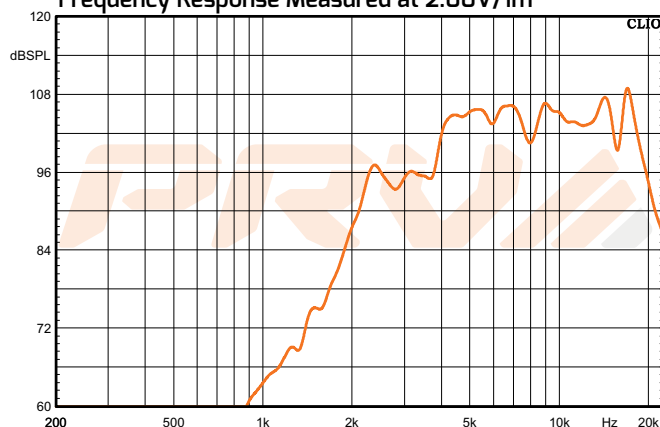

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
POMPANO BEACH, FL SAO LEOPOLDO, RS
support@prvaudio.com vendas@pvaudio.com.br
www.prvaudio.com www.pvaudio.com.br

Overall depth	2.58" (65.5 mm)
Mounting Depth	1.51" (38.5 mm)
Overall Diameter	3.03" (77 mm)
Cutout Diameter	1.69" (43 mm)
Net Weight	1.25 lbs (0.57 kg)
Shipping Weight	1.37 lbs (0.62 kg)
Carton Dimensions W x L x H	3.35" x 3.35" x 3.57" (85 x 85 x 91 mm)

Mounting option 1: Bolting it on the baffle

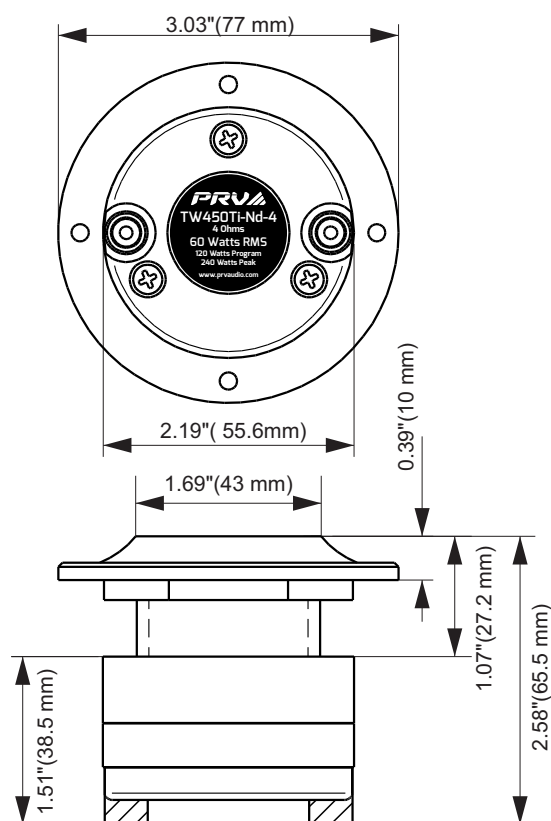

Mounting option 2: Screw on through the baffle

