

● *Woofer model: AUGWL0016-JN03*

This 6.5 inch Woofer, features 2 inch voice coil, pulp with carbon fiber cone, and ferrite magnet motor system. As for the selection of material, this series of driver uses a new mixed material with pulp and 60% carbon fiber, it can greatly enhance the stiffness of the cone body and control range of the internal damping.

● *Transducer front and side images:*



● *Specifications:*

*T-S Parameters*

Resonance frequency [fs]	40.2 Hz
Mechanical Q factor [Qms]	2.298
Electrical Q factor [Qes]	0.364
Total Q factor [Qts]	0.314
Force factor [Bl]	6.726 Tm
Mechanical resistance [Rms]	2.116 kg/s
Moving mass [Mms]	19.265 g
Compliance [Cms]	0.815 mm/N
Effective diaph. diameter [D]	134 mm
Effective piston area [Sd]	141.03 cm <sup>2</sup>
Equivalent volume [Vas]	22.93 l
Sensitivity (2.83V/1m)	89 dB
Ratio Bl/√Re	3.65 N/√W
Ratio fs/Qts	128 Hz

*Electrical Data*

Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	3.99 Ω
Maximum impedance [Zo]	20.41 Ω
DC resistance [Re]	3.39 Ω
Voice coil inductance [Le]	0.156 mH


*Power Handling*

100h RMS noise test (IEC 18.4)	80 W
Long-term max power (IEC 18.2)	100 W

*Voice Coil & Magnet Data*

Voice coil diameter	49.55 mm
Voice coil height	16 mm
Voice coil layers	2
Height of gap	6 mm
Linear excursion	± 5 mm
Max mech. excursion	± - mm
Unit weight	2.4 kg

● Frequency Response / Impedance Curve:

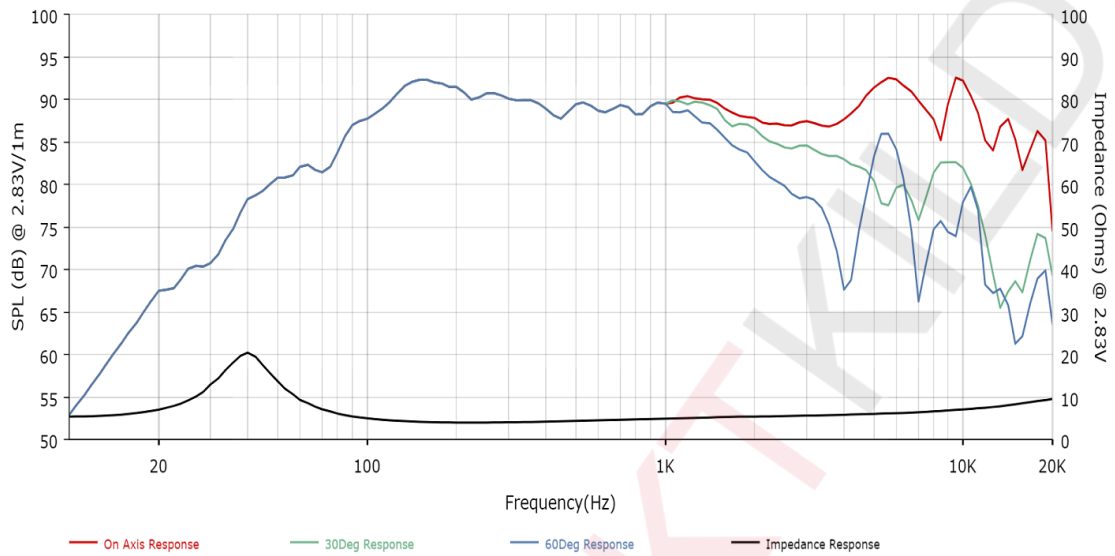

● Transducer front and side images:

