


S.M.S.L



D1

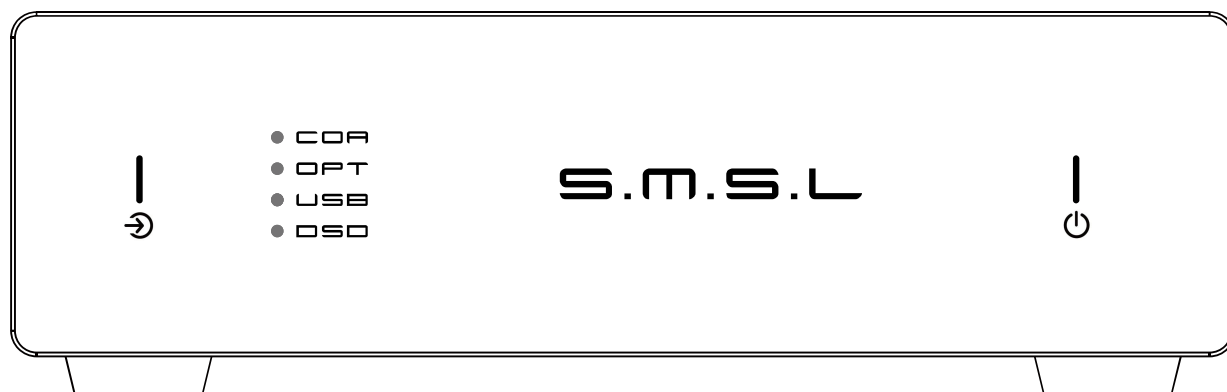

USER MANUAL

<http://smsl-audio.com/>

The contents of this manual may be changed with the edition, and are subject to change without notice!

Ver 1.0

Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold..
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact a person or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

Important note:

The product specifications and information mentioned in this manual are for reference only. The content of this manual is subject to change without notice.

Warranty Terms

Warranty Terms

1.The term of service Foshan Shuangmusanlin Technology Co., Ltd. promises good quality products. If the product is defective by normal use within 7 days after purchasing, the customer can chose to send it back for returning or repairing (only the product does not affect the secondary sales can be returned). Faulty for free within one year warranty normal use.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, on line shopping can show the screenshot of trade.

3.Following situation can not enjoy "Three Guarantees service"

a.All damages by human factors,including use it under non-normal working environment the and not follow manual in structions.

b.User privately disassemble, modification, maintenance.

c.Use non-designated or approved accessories cause damage.

d.QC or warranty stickers damage on cabinet.

e.Can not provide a valid purchasing prove.

f. Not belong to SMSL product.

4.How to guarantee These terms only suitable for China mainland, other region please refer to the policy of the local sales agents and nations.

Features


- Adopt a piece of ROHM new BD34352EKV, and carefully tuned to make its THD + N reached 0.00038%;
- High-quality sound design, unique and charming tone;
- Ultra-compact design with neat touch button panel.
- Using the latest XMOS XU-316 program support to 32bit/768kHz and DSD512;
- Support optical, coaxial input, maximum support to 24bit/192kHz;
- Built-in high-performance power filtering system, making it possible to achieve optimal performance using only the USB port power supply!
- Anodized CNC aluminum alloy case;
- Japan Electronic Audio Association Hi-res certification.

Specification

Input	USB / Optical / Coaxial		
Output Level	2.0Vrms		
THD+N	0.00038% (-108dB)		
Dynamic range	119dB		
SNR	119dB		
USB transmission method	Asynchronous Transmission		
USB compatibility	Windows 7 / 8 / 8.1 / 10 / 11 Mac OSX 、 Linux		
Bit depth			
	USB	1bit ~ 32bit	
	Optical/coaxial	16bit ~ 24bit	
Sampling rate			
	USB	PCM	44.1kHz~768kHz
		DSD	2.8224~22.5792MHz
	Optical/Coaxial	44.1kHz~192kHz	
Power Consumption	<5W		
Standby power	<0.1W		
Size	101 x 33 x 90.1mm (WxHxD)		
Weight	201.1g/0.443lbs		

Specifications are subject to change without notice.

Display Interface and Instructions

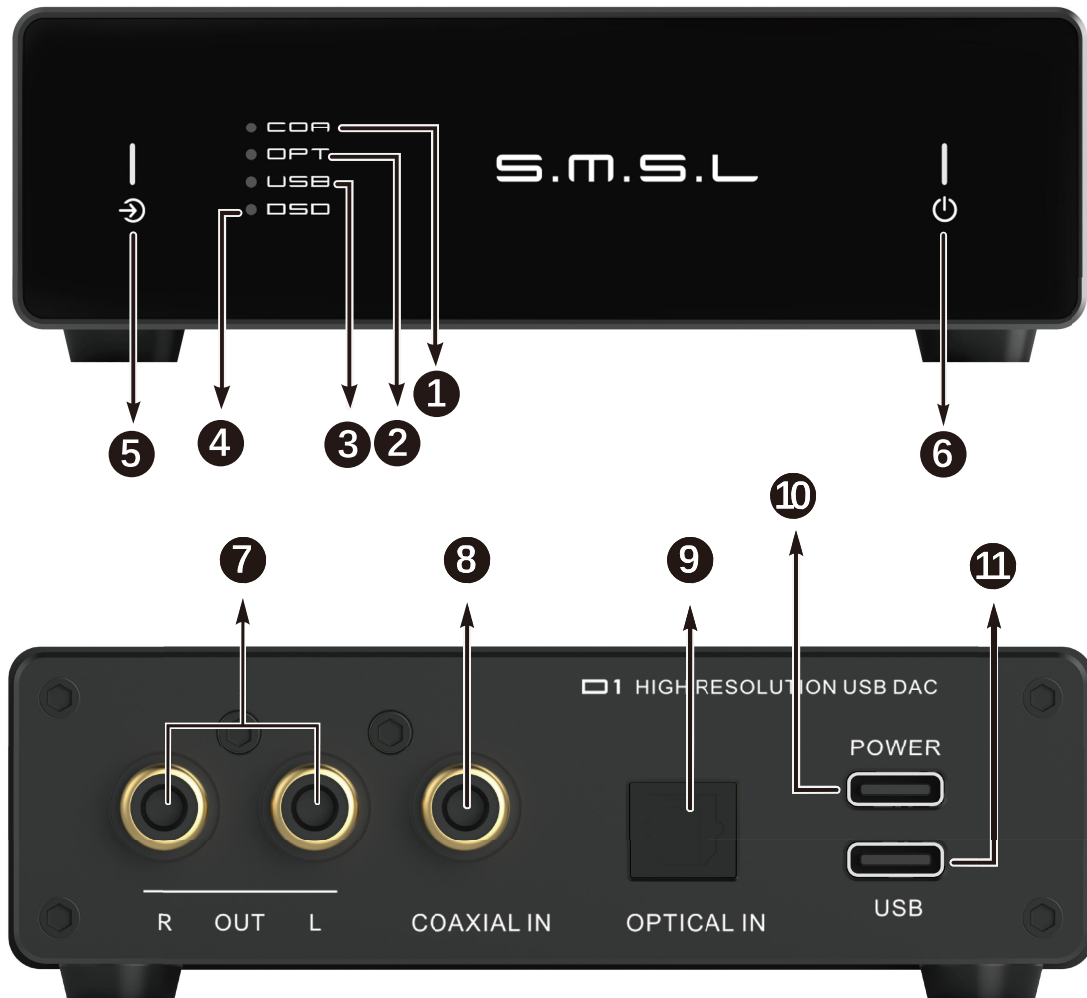

- | | |
|-----------------------------------|-----------------|
| 1 Coaxial Input Light | 7 RCA output |
| 2 Optical input light | 8 Coaxial Input |
| 3 USB input light | 9 Optical Input |
| 4 DSD Indicator Light | 10 POWER input |
| 5 Input button (Touch-Sensitive) | 11 USB Input |
| 6 Power button (Touch-Sensitive) | |

Instructions for use

■ Botton

- Long press the power button to turn off the power, short press to turn on the power.
- Short press the Input button to switch the input source, the input will switch between “USB, optical , coaxial”.

