


# S.M.S.L

## D10

### USER MANUAL

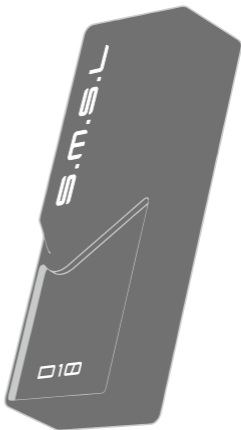

<http://smsl-audio.com/>

The contents of this manual may be changed with the edition, and are subject to change without notice!

Ver 1.1

## Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold..
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact alesperson or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

### Important note:

The product specifications and information mentioned in this manual are for reference only. The content of this manual is subject to change without notice.

## Warranty Terms

### Warranty Terms

1.The term of service Foshan Shuangmusanlin Technology Co., Ltd. promises good quality products. If the product is defective by normal use within 7 days after purchasing, the customer can chose to send it back for returning or repairing (only the product does not affect the secondary sales can be returned ). Faulty for free within one year warranty normal use.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, on line shopping can show the screenshot of trade.


3.Following situation can not enjoy“Three Guarantees service”

- a.All damages by human factors,including use it under non-normal working environment the and not follow manual in structions.
- b.User privately disassemble, modification, maintenance.
- c.Use non-designated or approved accessories cause damage.
- d.QC or warranty stickers damage on cabinet.
- e.Can not provide a valid purchasing prove.
- f. Not belong to SMSL product.

4.How to guarantee These terms only suitable for China mainland, other region pleaserefer to the policy of the local sales agents and nations.

## Features

- CIRRUS LOGIC DAC chip 2xCS43131.
- Supports DSD256 hardware decoding and PCM 32bit/384kHz.
- 4.4mm balanced headphone output.

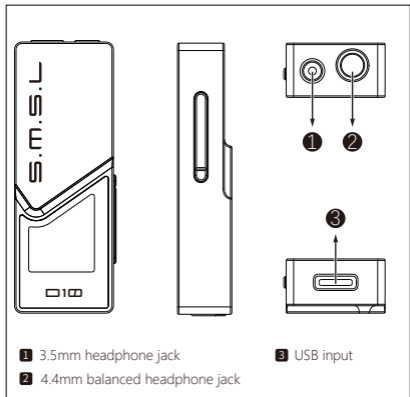

## Specifications

Input	USB(Asynchronization)		
Output	3.5mm headphone jack		
	4.4mm balanced headphone jack		
USB compatibility	Windows 7 / 8 / 8.1 / 10 / 11(Needs Driver)		
	Mac OSX10.6+、Linux 、 Android、 iOS		
maximum output level	2 Vrms		
Headphone output power	16Ω	500mW	
	32Ω	500mW	
	150Ω	160mW	
	300Ω	80mW	
	600Ω	40mW	
THD+N(non-Weighting)	0.00015%(116dB)		
Dynamic range	121dB		
SNR	121dB		
Sampling Rate	USB	PCM	44.1 ~ 384kHz
		DSD	2.8224 ~ 11.2896MHz
Bit Depth	USB	1bit,24 ~ 32bit	
power	5V/200mA		
Size	55x11x20mm(WxHxD)		
Weight	17.5g		

SMSL reserves the right to make improvements which may result in specification or feature changes without notice.