


SPECIFICATIONS

| | |
|-----------------------|-----------------------|
| Rating | AC125V 0.3A |
| Contact Resistance | 50 mΩ Max. |
| Insulation Resistance | DC500V-100 MΩ Min. |
| Withstand Voltage | AC500V-1 Minute |
| Rotation Torque | 1.0±0.5 Kg-cm |
| Sizes (m.m) | As Following Drawings |

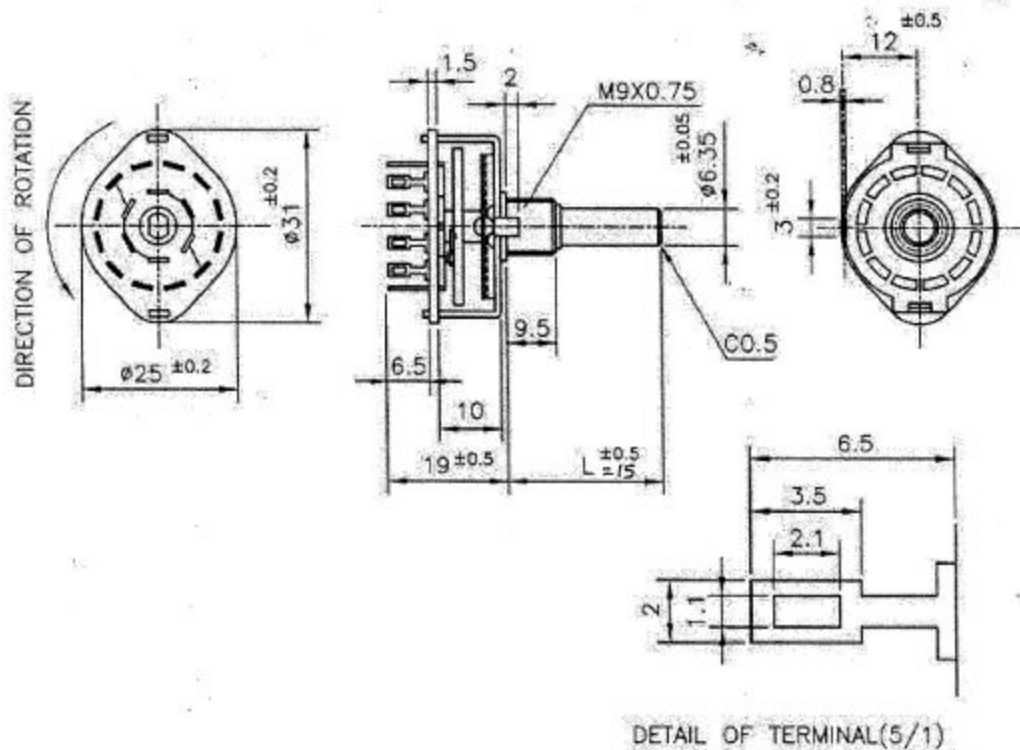

- NOTE: 1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.4mm
 2. ACCESSORY PARTS: M9 HEXAGON NUT ONE PIECE & WASHER ONE PIECE
 3. TIMING: SHORTING

Date

2005.08.31

DWN




CHKD




APP'D




1-pole 12-way non-shorting rotary switch

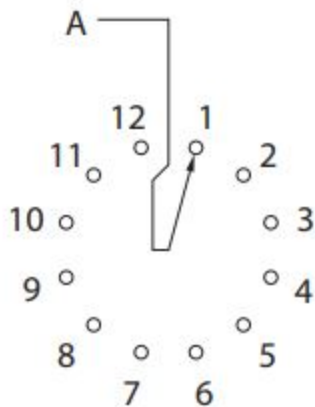

2-pole 6-way non-shorting rotary switch

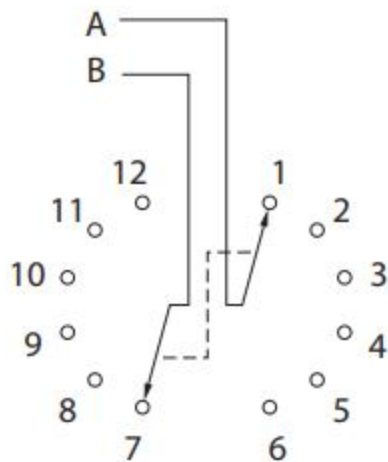

1-pole 12-way shorting rotary switch

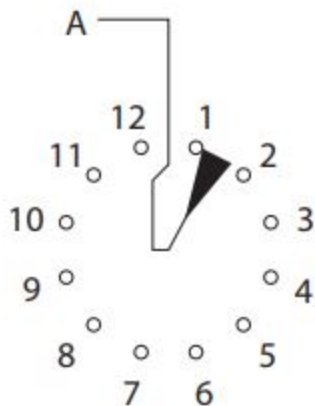

2-pole 6-way shorting rotary switch

