


# F SERIES

# W4-1879

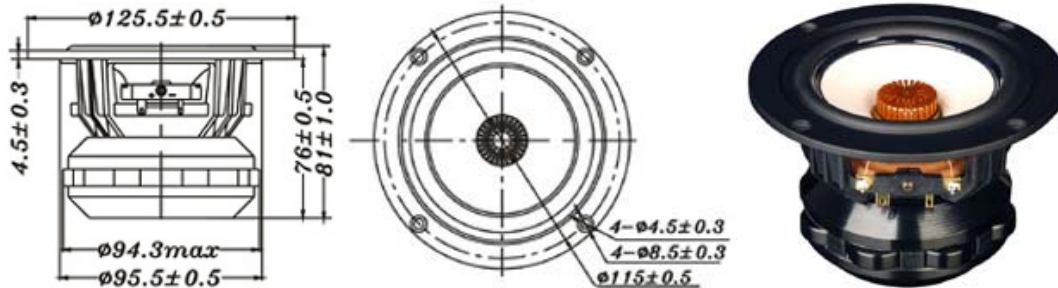

4" PAPER FULL RANGE

- FULL RANGE DESIGN
- UNDERHUNG MOTOR DESIGN WITH NEO MAGNET,  $X_{max}=5\text{mm}$
- VERY LOW THD(2nd AND 3rd HARMONIC DISTORTING)
- UNIQUE PHASE PLUG FOR BETTER DISPERSION
- BAMBOO FIBER PAPER CONE WITH DURABLE FOAM RUBBER SURROUND

DIAPHRAGM MTL	Paper
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	8 $\Omega$
DCR IMPEDANCE	6.3 $\Omega$
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	55-20K Hz
FREE AIR RESONANCE	55 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	15 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	4.19 TM
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	4.0 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1977 $\mu\text{MN}^{-1}$
EFFEC.PISTON AREA	0.0057 $\text{M}^2$
Levc	0.025 mH
Zo	39 ohm
X-max	5.0 mm
Vas	9.12 Liter.
Qts	0.43
Qms	2.68
Qes	0.51



**TB** SPEAKERS  
 VOICE:886.2.26570282 FAX:886.2.26580166  
 E-MAIL :info@tb-speaker.com

**CLOSE**