F SERIES W4-655SH

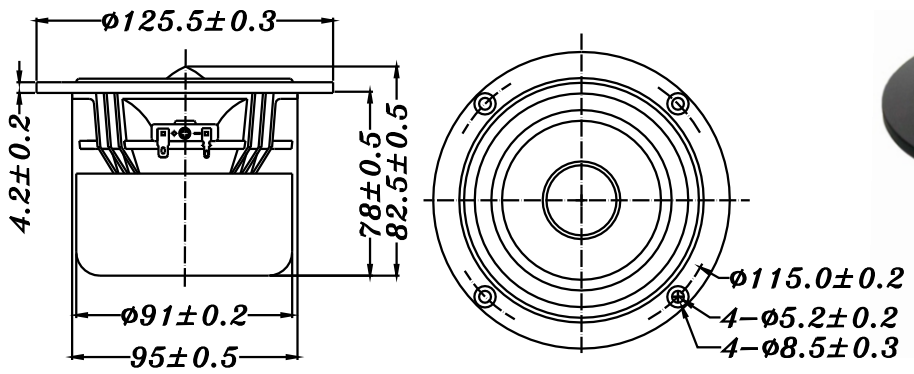

- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- DIE CAST BASKET
- PAPER CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTON BOBBIN
- ALUMINUM PHASE PLUG

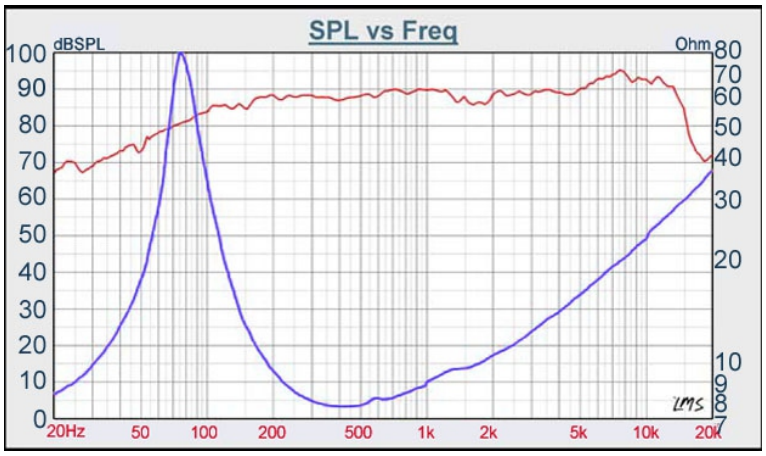

4" PAPER CONE/ FULL RANGE,WOOFER

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6 Ω
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	70 - 14K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.84 TM
TYPE OF MAGNET	Ferrite
MOVING MASS	3.99 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1303 uMN^{-1}
EFFECTIVE PISTON AREA	0.0057 M^2
Levc	0.124 mH
Zo	102 Ω
X-max	3.3 mm
Vas	6.01 Litr.
Qts	0.29
Qms	5.57
Qes	0.31

TB SPEAKERS
VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com