


# SD500-6 Subwoofer Amplifier 500W/4 Ω

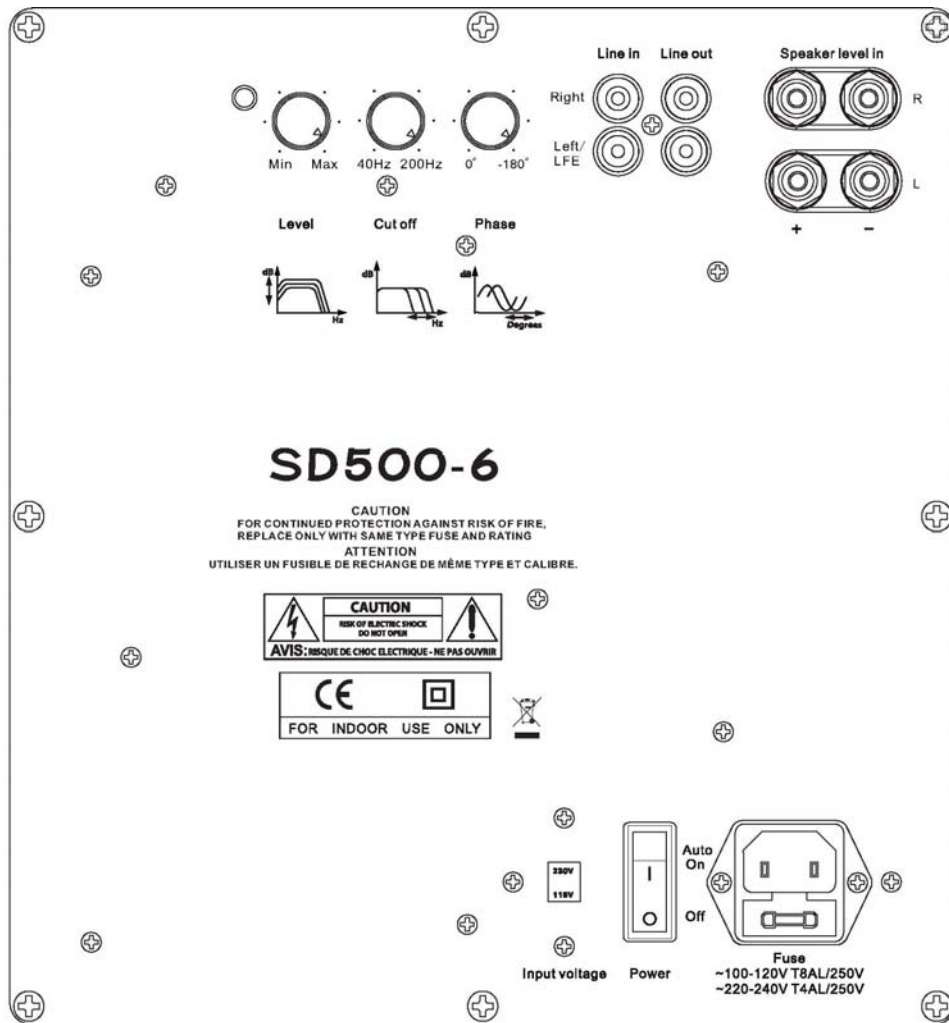

Features:	Specifications:	
● Class D Subwoofer Amplifier With Switching Power Supply.	Power Output @4 Ohm (RMS)	500W
● Variable Low Pass Frequency Control	Standby @ Audio Det. Circuit Load	< 0.5W
● Variable Volume Control.	Total Harmonic Distortion	< 1%
● Variable Phase Control	S/N Ratio @ Rated Power	> 90dB
● Auto On/Off Control.	Input Sensitivity @ High Level	3.0V/ 50Hz
● Provide High Level In.	Input Sensitivity @ Low Level	210 mV/ 50Hz
● Provide Low Level In/Out.	Variable Low Pass Frequency	40Hz ~ 200Hz
●W/ Limiter Circuit Protection	Variable Phase Control	0 ~ - 180 degree
●W/ DC Off Set Protection.	Panel Dimension (in mm)	270*250*4
●W/ Output Short Circuit Protection.	Operating Voltage	1.) 115Vac +-10% 2.) 230Vac +-10%
● LED Power Indicator.		
●AC 115V/230V switchable		
● IEC Power Socket.		

**Yung International Inc.**

<http://www.yung.com.tw>

7/F No.8, Lane 270, Pei Shen Road Sec.3, Shen Keng Dist.,222 New Taipei City, Taiwan.

TEL. : 886-2-26628811    FAX. : 886-2-26626611    E-mail: sales\_tw@yung.com.tw