
DMA80-PR 3" DMA Series Passive Radiator



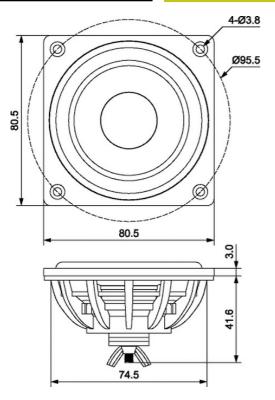

FEATURES

- Perfect match for the Dayton Audio DMA series drivers
- Allows tuning small enclosures lower than possible using conventional ports
- Rear mounted threaded post allows easy mass adjustment for custom tuning
- DIY friendly, oversized mounting flange makes installation simple

PARAMETERS	
Fs	34.6 Hz
Qms	8.91
Mms	13.7 g
Cms	1.41 mm/N
Sd	31.2 cm ²
Vd	21.8 cm ³
Vas	2.14 liters
Xmax	7 mm
Rms	0.33 kg/s

 $\textbf{Note:} \ \mathsf{Parameters} \ \mathsf{above} \ \mathsf{are} \ \mathsf{for} \ \mathsf{the} \ \mathsf{passive} \ \mathsf{onlywith} \ \mathsf{no} \ \mathsf{additional} \ \mathsf{mass} \ \mathsf{added}.$