


MODULE


T3-2190S

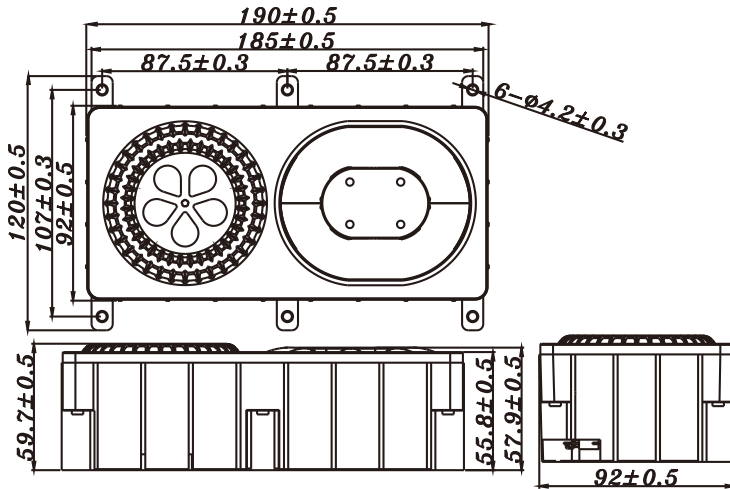

- NEODYMIUM MAGNET, LONG STROKE SUBWOOFER DRIVER.
- PATENTED PASSIVE RADIATOR BOX DESIGN TO MAKE LOW BASS = 50 HZ.
- THIN AND FLAT DESIGN, EASY FOR EXTERIOR DESIGN.
- GOOD FOR PORTABLE, SMART HOME AND VARIETY OF CROSS-INDUSTRY APPLICATIONS THAT NEED LOW-BASS SOLUTIONS.

SYSTEM SPECIFICATION

SYSTEM	Passive radiator design
ACTIVE DRIVER	86mm inverted shape driver
DIAPHRAGM	PP composite with elastomer
HOUSING	PP composite material
FINISH	Black
DIMENSIONS	190 x 92 x 59.7mm
VOICE COIL DIAMETER	25.4 mm
IMPEDANCE	4 ohm
POWER LOADING	15 W (RMS)
MUSIC POWER	30 W
RESPONSE RANGE	50Hz - 2KHz
SENSITIVITY 1W / 1m	80 dB
FO	50Hz
POWER RECOMMENDED	30 W (RMS)
DESIGN SUGGESTION	High pass filter with 45Hz, -12dB/oct

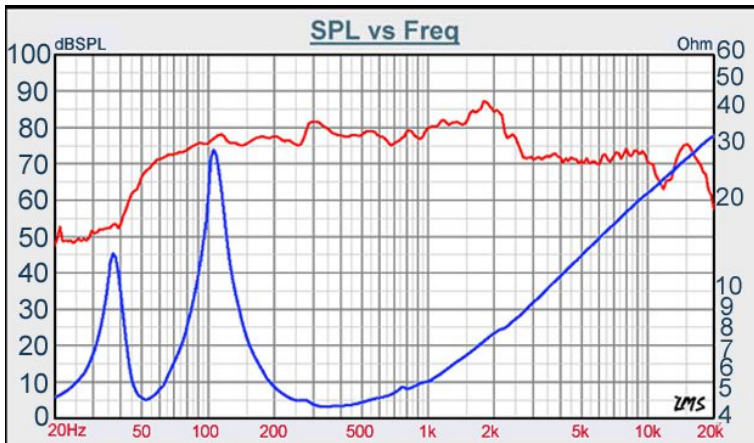

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com